


# DynaFlow 5060

## front fascia airdams and curb feelers

DynaFlow 5060 was developed to be soft enough to take curb impacts under severe cold temperatures and rigid enough to keep application shape under wind loads. DynaFlow 5060 is a compounded TPO and is being used in applications that had been TPV or EPDM until recently. This product is soft like a TPV and is used in applications as a cost savings when cross-linking is over engineered with properties like compression set or oil swell.

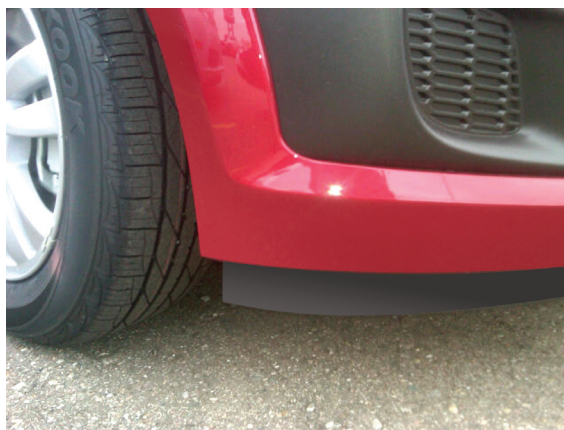

## key material advantages

- Shore Hardness - 50D
- Excellent Surface Durability
- UV Stable to 4500kJ
- Chemical Resistance
- Colorable to OEM Requirements
- Very Good Processability
- Excellent Cold Temperature Impact

